



## Coil Tester & Breaker Supply POB30ADL

- Lightweight - only 9 kg
- Powerful – up to 30 A
- Voltage 1 V to 50 V DC
- Voltage 1 V to 40 V AC
- Output protection
- Fully automatic operation



### Powerful DC and AC power supply for a circuit breaker test

POB30ADL is a power supply unit employing the latest power electronics technology. POB30ADL generates ripple free DC-voltage and it is developed for regular maintenance tests of power circuit breakers. POB30ADL generates also AC voltage. Output voltage is selectable from 1 V to 50 V DC or from 1 V to 40 V AC.

The POB30ADL is powerful and versatile unit, with possibility to generate at 230 V mains supply initial current of 30 A as well as continuous current according to the table below:

Load Voltage	Mains Voltage	Max Current	Max load
115V/230V	5V	24A 20A 8A	20sec 60sec continuously
	15V	24A 20A 8A	20sec 60sec continuously
	25V	24A 20A 8A	20sec 60sec continuously

The set is equipped with thermal and overcurrent protection. POB30ADL is easy to use and has accessory cable-set with touch-proof contacts.

The POB30ADL has very high ability to cancel electrostatic and electromagnetic interference in HV electric fields. It is achieved by very efficient filtration. The filtration is made utilizing proprietary hardware and software.

## Applications

POB30ADL is developed for use in switchyards, electric power and industrial environment. An important part of commissioning and maintenance testing is a circuit breaker testing.

POB30ADL is possible to use for:

- ✓ minimum trip voltage-test of the circuit breaker's coils
- ✓ supplying spring-charging motors
- ✓ power supply at test with breaker analysers

POB30ADL have built-in capability to perform automatic test of minimum trip voltage. The minimum trip voltage test is described in a number of international and national standards such as IEC 62271-100, ANSI C37.09 etc. Many other important parameters are possible to test with a breaker analyzer. POB30ADL is then used as a power supply unit. It is compatible with breaker analyzers from different vendors. POB30ADL can also be used as general power supply unit or temporary battery charger.

### Automatic testing of the minimum trip voltage of a breaker

Procedure steps:


1. Make certain that the mains are de-energised on both sides of the breaker, safety grounded and that local safety regulations are followed.
2. Connect Power supply unit POB30ADL to the breaker's coil circuit.
3. Set the minimal test voltage.
4. Set the step voltage.
5. Set the maximal voltage.
6. Press TRIG button.

#### Standard accessories

- ✓ Cable set 6 x 2 m 2,5 mm<sup>2</sup>
- ✓ Extern trigger cable set 2 m
- ✓ Mains power cable
- ✓ Ground (PE) cable
- ✓ Transport case

#### Optional accessories

- ✓ Cable set 6 x 5 m 2,5 mm<sup>2</sup>
- ✓ Test shunt 50A/100mV

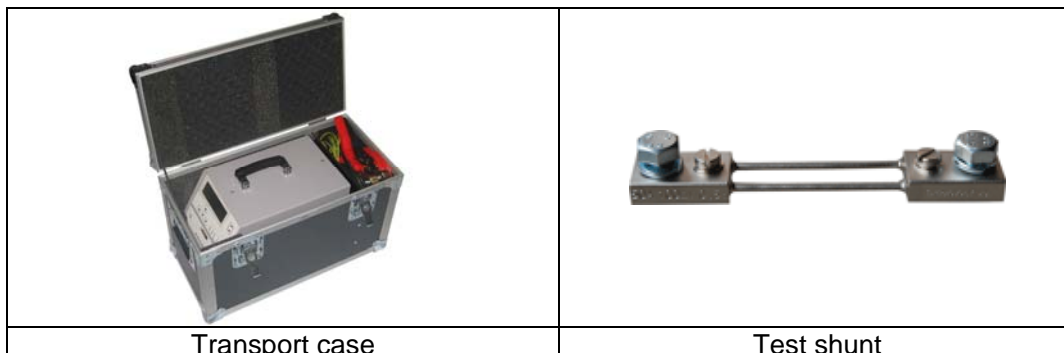

## Technical data

### 1 - Mains Power Supply

- Connection according to IEC/EN60320-1; UL498, CSA 22.2
- Voltage single phase 110 V – 240 V AC, +10% - -15%
- Frequency 50/60 Hz

### 2 - Output data

- Coils output DC Voltage 1 V to 50 V DC
- Coils output AC Voltage 1 V to 40 V AC; 50 Hz; true RMS
- Motor output DC Voltage 1 V to 50 V DC
- Output current max 30 A

### 3 – Measurement

- Voltage 1 V – 50 V DC or 1 V – 40 V AC
- Current 1 A – 50 A
- Accuracy  $\pm(0,5\% \text{ rdg} + 0,5\% \text{ FS})$

### 4- Environment conditions

- Operating temperature  $-10^{\circ}\text{C} - +50^{\circ}\text{C} / 14^{\circ}\text{F} - +122^{\circ}\text{F}$
- Storage and transportation  $-25^{\circ}\text{C} - +70^{\circ}\text{C} / -13^{\circ}\text{F} - +158^{\circ}\text{F}$
- Humidity 5% – 95% relative humidity, non-condensing

### 5 - Dimensions and Weight

- Dimensions 198 mm x 255 mm x 380 mm  
7,8 in x 10 in x 15 in  
(W x H x D) without handle
- Weight 9 kg/19,8 lbs

### 6- Mechanical protection

IP 43

### 7- Warranty

two years

### 8 – Safety Standards

- European standards EN 61010-1
- International standards IEC 61010-1  
UL 3111-1  
CAN/CSA-C22.2 No 1010.1-92

### 9 – Electromagnetic Compatibility (EMC)

- CE conformity EMC standard 89/336/EEC
- Emission EN 50081-2, EN 61000-3-2/3
- Interference Immunity EN 50082-2

Specifications are subject to change without notice.



**IBEKO POWER AB**

Box 1346, 181 25 LIDINGÖ, SWEDEN, TEL: +46 8 731 76 99, FAX: +46 8 731 77 99, [sales@dv-power.com](mailto:sales@dv-power.com), [www.dv-power.com](http://www.dv-power.com)